

STRAPS

Polypropylene straps

These straps are available from 5 – 15 mm width. They are eco-friendly, food safe and ecologically compatible. The standard colour is black.

All other colours and dimensions upon request.

Most efficient packaging concept!

- The time for changing the coils will be shortened.
- Optimum protection.

Polypropylene strap – machine quality

| Article no. | Dimension (mm) | Sleeve Ø | Roll length | min. tensile strength |
|-------------|----------------|--------------|-------------|-----------------------|
| PP05155035 | 5 x 0.35 | 200 x 190 mm | 8,000 m | 45 kg |
| PP05155040 | 5 x 0.40 | 200 x 190 mm | 7,000 m | 53 kg |
| PP05100047 | 5 x 0.47 | 150 x 160 mm | 6,100 m | 55 kg |
| PP05155047 | 5 x 0.47 | 200 x 190 mm | 7,000 m | 55 kg |
| PP06900055 | 6 x 0.55 | 200 x 190 mm | 4,700 m | 60 kg |
| PP08155045 | 8 x 0.45 | 200 x 190 mm | 4,500 m | 85 kg |
| PP09155055 | 9 x 0.55 | 200 x 190 mm | 3,500 m | 90 kg |
| PP10900055 | 10 x 0.55 | 200 x 190 mm | 3,000 m | 100 kg |
| PP12155055 | 12 x 0.55 | 200 x 190 mm | 2,500 m | 110 kg |
| PP12155063 | 12 x 0.63 | 200 x 190 mm | 2,000 m | 150 kg |
| PP12200063 | 12 x 0.63 | 280 x 185 mm | 2,000 m | 150 kg |
| PP12155080 | 12 x 0.80 | 200 x 190 mm | 1,700 m | 220 kg |
| PP12200080 | 12 x 0.80 | 280 x 185 mm | 1,700 m | 220 kg |
| PP12250080 | 12 x 0.80 | 406 x 150 mm | 2,000 m | 220 kg |
| PP15900050 | 15 x 0.90 | 406 x 150 mm | 1,400 m | 410 kg |

Standard colour black, other colours and dimensions upon request.

Standard layout

Core Ø150/200/280 mm
Core Ø 406 mm

Delivery quantity

2 rolls/cardboard box
1 roll/cardboard box


24 cardboard boxes/pallet
40 cardboard boxes/pallet

Straps

Polyester straps

From 9 - 15,5 mm strap width in high quality and medium tensile strength. These straps are stable in temperature and allow a high strength and elasticity for an optimum transport security.

All straps are suitable for machines and hand strapping tools.

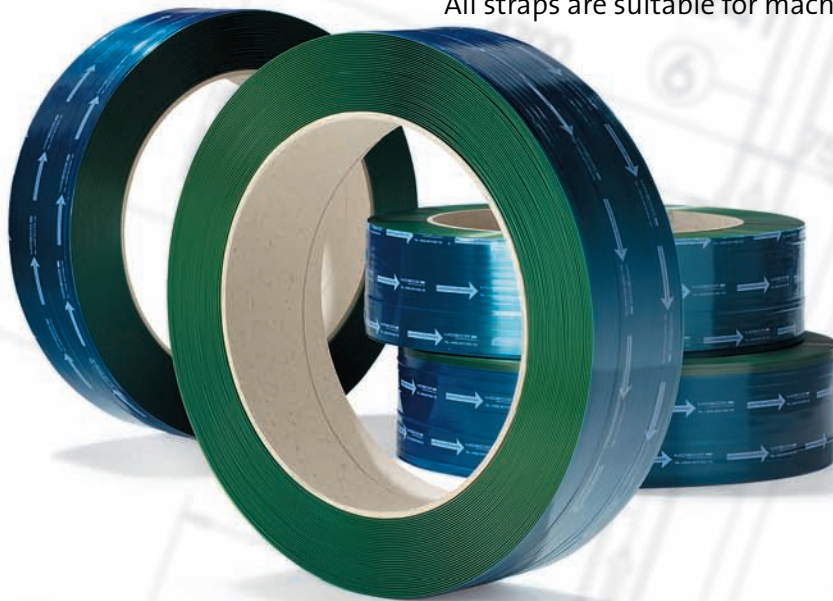

Polyester strap – machine quality

| Article no. | Dimension (mm) | Roll length | average tensile strength |
|-------------|----------------|-------------|--------------------------|
| PET09512054 | 9.5 x 0.54 | 3,500 m | 170 kg |
| PET09510064 | 9.5 x 0.64 | 3,200 m | 200 kg |
| PET12010054 | 12.0 x 0.54 | 2,500 m | 200 kg |
| PET12010058 | 12.0 x 0.58 | 2,500 m | 230 kg |
| PET12010070 | 12.0 x 0.70 | 2,000 m | 240 kg |
| PET12010062 | 12.0 x 0.62 | 2,500 m | 340 kg |
| PET12510054 | 12.3 x 0.54 | 2,500 m | 240 kg |
| PET12510058 | 12.3 x 0.58 | 2,500 m | 300 kg |
| PET12510066 | 12.5 x 0.66 | 2,000 m | 350 kg |
| PET15010055 | 15.0 x 0.55 | 2,000 m | 360 kg |
| PET15010066 | 15.0 x 0.66 | 1,750 m | 470 kg |
| PET15010080 | 15.0 x 0.80 | 1,400 m | 500 kg |
| PET15510089 | 15.5 x 0.89 | 1,300 m | 580 kg |

Standard layout

Core Ø: 406 mm inside
590 mm outside
Width: 150 mm

Delivery quantity

Cardboard box = 1 roll
Euro-pallet = 20 rolls
Disposable pallet = 40 rolls



05 / 11 Subject to Alterations

Gerd-Mosca-Straße 1
D-69429 Waldbrunn/Germany
Tel.: +49 (0)6274/932-0
Fax: +49 (0)6274/932-400 118
Internet: <http://www.mosca.com>
E-Mail: strap@mosca.com

MASCHINENFABRIK GERD MOSCA AG



MOSCA AG stands for a worldwide, professional consulting, highest machine quality, optimal strapping material and a global, integrated service concept.